


Nordik Heavy Duty Inox

For use in very dirty, damp and aggressive conditions

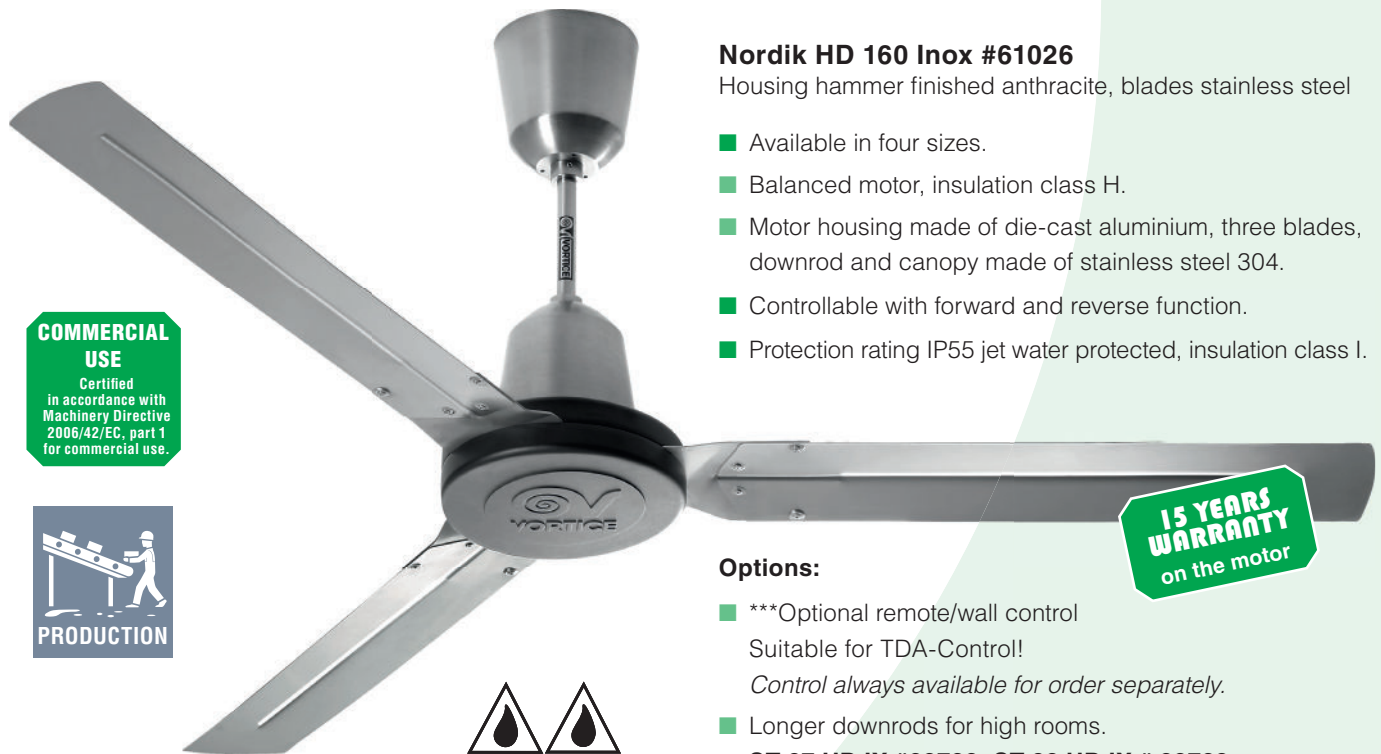

COMMERCIAL USE

Certified in accordance with Machinery Directive 2006/42/EC, part 1 for commercial use.



15 YEARS WARRANTY
on the motor

Nordik HD 160 Inox #61026

Housing hammer finished anthracite, blades stainless steel

- Available in four sizes.
- Balanced motor, insulation class H.
- Motor housing made of die-cast aluminium, three blades, downrod and canopy made of stainless steel 304.
- Controllable with forward and reverse function.
- Protection rating IP55 jet water protected, insulation class I.

Options:

- ***Optional remote/wall control
Suitable for TDA-Control!
Control always available for order separately.
- Longer downrods for high rooms.

ST 67 HD IX #22722, ST 92 HD IX # 22723



HEAVY DUTY!

Especially well suited for use in conditions involving damp, dust, dirt, with high temperatures and in aggressive environments




Newly developed mount to secure with four screws and vibration absorbers with integrated stainless steel cable protection

Product	Code No.	Housing colour	Blade colour
Nordik HD 120 Inox	61024	Hammer finished anthracite	Stainless steel 304
Nordik HD 140 Inox	61025	Hammer finished anthracite	
Nordik HD 160 Inox	61026	Hammer finished anthracite	
Nordik HD 200 Inox	61027	Hammer finished anthracite	

Technical Details

Power motor (W)	120 +140: 80 160 +200: 85	Rpm min.-1 max.	186-233
Voltage (V/Hz)	230~50	Weight (kg)	7.3-9.1
Number of speeds	1 (3-5)***	Number of fan blades	3
Sound pressure (L _p -3 m) dB(A)	120: 34.3 140: 37.9 160: 38.1 200: 38.9	Airflow max.* (m³/h)	120: 14,050 140: 16,000 160: 19,300 200: 22,050
Sound power (L _w) dB(A)	120: 51.8 140: 55.4 160: 55.6 200: 56.4	Service value (m³/min/W)	120: 2.925 140: 3.332 160: 3.780 200: 4.320

Ø (mm)	
120:	1,218
140:	1,422
160:	1,524
200:	2,000

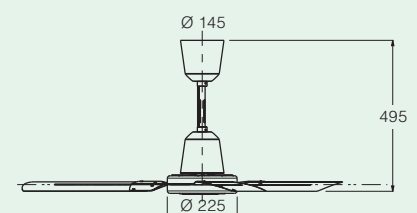

* measured in accordance with IEC 60879
Ambient temperature - 10° to +50 °C.